




PATIO ON ASPHALT LANE - EXAMPLE 1

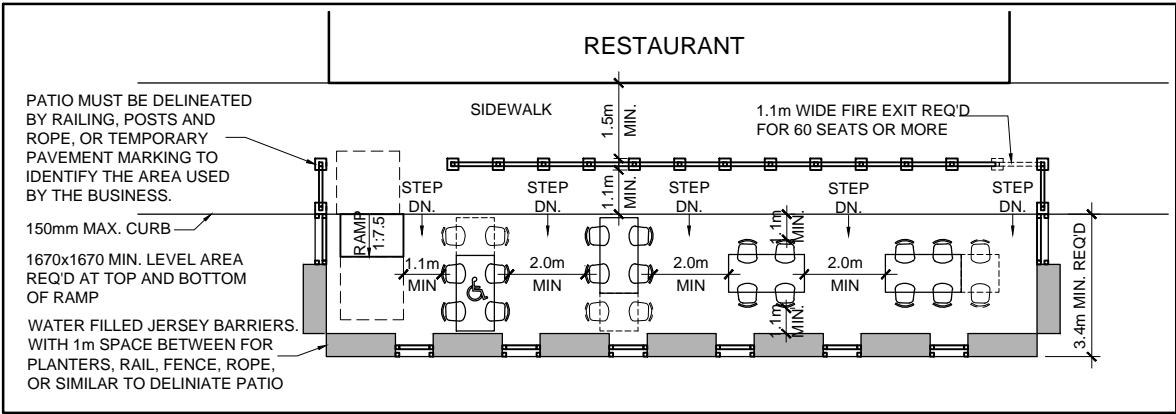

PATIO ON ASPHALT LANE - EXAMPLE 2
(Wide lane width req'd)

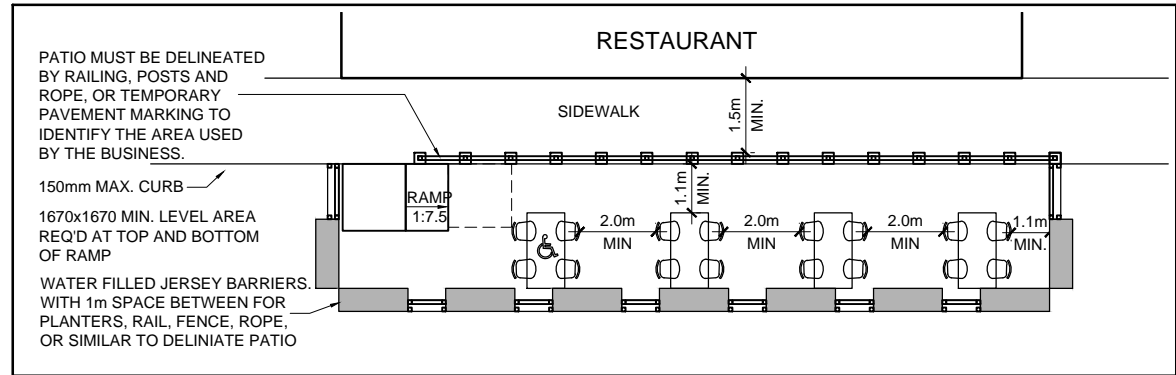

PATIO ON ASPHALT LANE - EXAMPLE 3
(For Narrow Sidewalks)

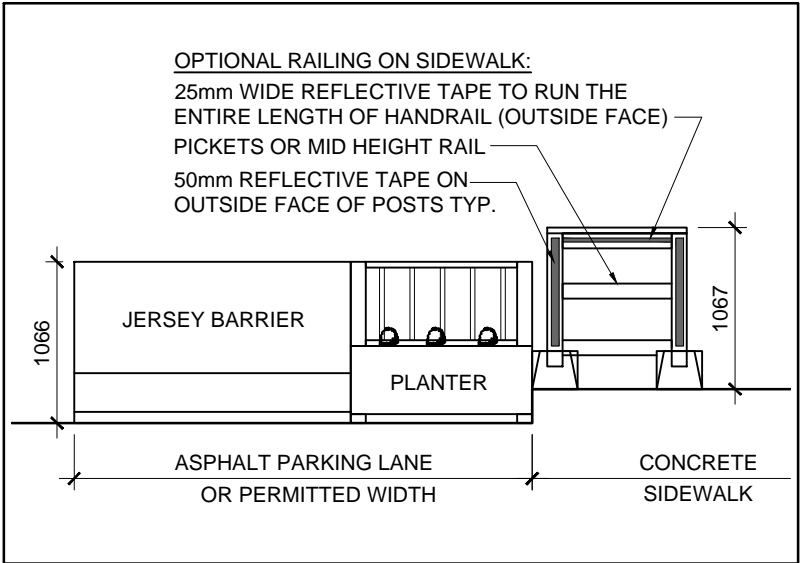

SIDE ELEVATION - EXAMPLE

- NOTES:
1. TABLE LAYOUT, RAMP LOCATION AND ENTRANCE OPENING CAN BE REARRANGED AS PREFERRED PROVIDED ALL CLEARANCES ARE MET.
 2. OVERALL SIDEWALK WIDTH OF 2.6m (+ WIDTH OF RAILING SUPPORT) IS REQUIRED FOR EXAMPLES 1 & 2.
 3. 3.4m MIN. IS REQUIRED FOR RAMP ORIENTATION SHOWN IN EXAMPLE 2.
 4. 1.1m CLEARANCE REQUIRED AROUND ALL TABLES AND CHAIRS. 2.0m REQUIRED BETWEEN TABLES PER COVID-19 REGULATIONS.
 5. A SECOND EXIT OPENING IS REQUIRED IF 60 OR MORE SEATS ARE PROVIDED.